

RIIFO Lead-free Brass Press Fittings Specifications

Product Information

RIIFO lead-free brass press fittings are manufactured from extruded or forged brass and are precision made to tight tolerances for a consistent fit with PEX tubing. All RIIFO fittings meet the stringent requirements of NSF/ANSI 61 and NSF/ANSI372 for lead extraction.

Recommended Applications

RIIFO lead-free brass press fittings are designed to be used with RIIFO PEX tubing to make connections from PEX tubing to: PEX tubing, manifolds, copper, faucets & fixtures, and a variety of other applications. Brass insert fittings are interchangeable with components from other suppliers provided they are manufactured to the same ASTM specifications. RIIFO provides a 25-year warranty on systems using both RIIFO PEX tubing and a 10-year warranty on fittings (see warranty for details).

Features & Benefits

- Fittings certified to maximum temperature of 200°F
- Fittings certified to maximum pressure of 160 psi
- Design certified to NSF/ANSI 61 and NSF 372 standards for use in potable water and hydronic heating water distribution

Certifications


RIIFO lead-free brass fittings have been tested for physical, performance, and health effects to NSF/ANSI61 and NSF 372..

RIIFO lead-free brass fittings certifications include, but are not limited to:

- ASTM F877
- NSF/ANSI 61
- NSF 372

Quality Assurance

When the product is marked with ASTM F877 designation, it affirms that the product was manufactured, inspected, sampled and tested in accordance with these specifications and has been found to meet the specified requirements.

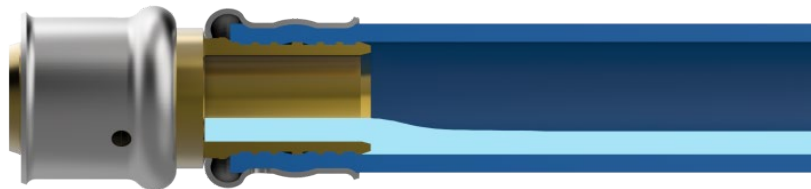


RIIFO Lead-free Brass Crimp Fittings

Brass Insert Fittings

Typical Fitting Insert Dimensions

| Size | A | B | L |
|------|-------|-------------|-------|
| 3/8" | 0.242 | 0.345±0.004 | 0.630 |
| 1/2" | 0.361 | 0.471±0.004 | 0.630 |
| 5/8" | 0.454 | 0.570±0.003 | 0.630 |
| 3/4" | 0.546 | 0.667±0.004 | 0.630 |
| 1" | 0.719 | 0.856±0.004 | 0.630 |

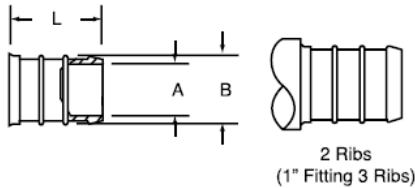

Friction Loss*


Equal Feet of RIIFO PEX Tubing

| Size | Coupling | 90° Elbow | Run Tee | Tee Branch |
|------|----------|-----------|---------|------------|
| 3/8" | 0.14 | 0.28 | 0.30 | 0.50 |
| 1/2" | 0.21 | 0.42 | 0.46 | 0.75 |
| 5/8" | 0.32 | 0.63 | 0.69 | 1.13 |
| 3/4" | 0.27 | 0.54 | 0.59 | 0.97 |
| 1" | 0.43 | 0.85 | 0.93 | 1.52 |

*Note: Based on tubing nominal flow rate of 2fps flow velocity.

Copper Crimp Ring Dimensions Before Crimping


| Size | D | W | T |
|------|-------|-------|-------|
| 3/8" | 0.630 | 0.325 | 0.058 |
| 1/2" | 0.750 | 0.325 | 0.056 |
| 5/8" | 0.875 | 0.325 | 0.054 |
| 3/4" | 1.000 | 0.325 | 0.056 |
| 1" | 1.250 | 0.365 | 0.049 |



*Note: All dimensions are nominal

Crimped Diameter Dimensions

| Size | Min | Max |
|------|-------|-------|
| 3/8" | 0.580 | 0.595 |
| 1/2" | 0.700 | 0.715 |
| 5/8" | 0.815 | 0.830 |
| 3/4" | 0.945 | 0.960 |
| 1" | 1.175 | 1.190 |



Note: Final crimped outside diameters shall fall within the min and max dimensions when measured with micrometer or caliper.